

AIR TRAFFIC CONTROL SYSTEMS PSR/SSR SYSTEMS


● Fully Digital Technology ● Compact Body ● Low Life-Cycle Cost

Toshiba's modular integrated Primary and Secondary Surveillance Radar systems (PSR/SSR systems) have been developed for today's stringent air traffic control requirements. The radar system interfaces with the Radar Data Processing System (RDPS) and provides the RDPS with important, accurate and reliable radar data highly for controllers and pilots.

The requirements for air traffic control radar systems are becoming stricter due to safety concerns because of the increase in air traffic during past decade.

Toshiba's PSR/SSR systems are designed by making good use of advanced digital technology and have such good features as compact size and low life-cycle cost.

Configuration of a PSR/SSR systems

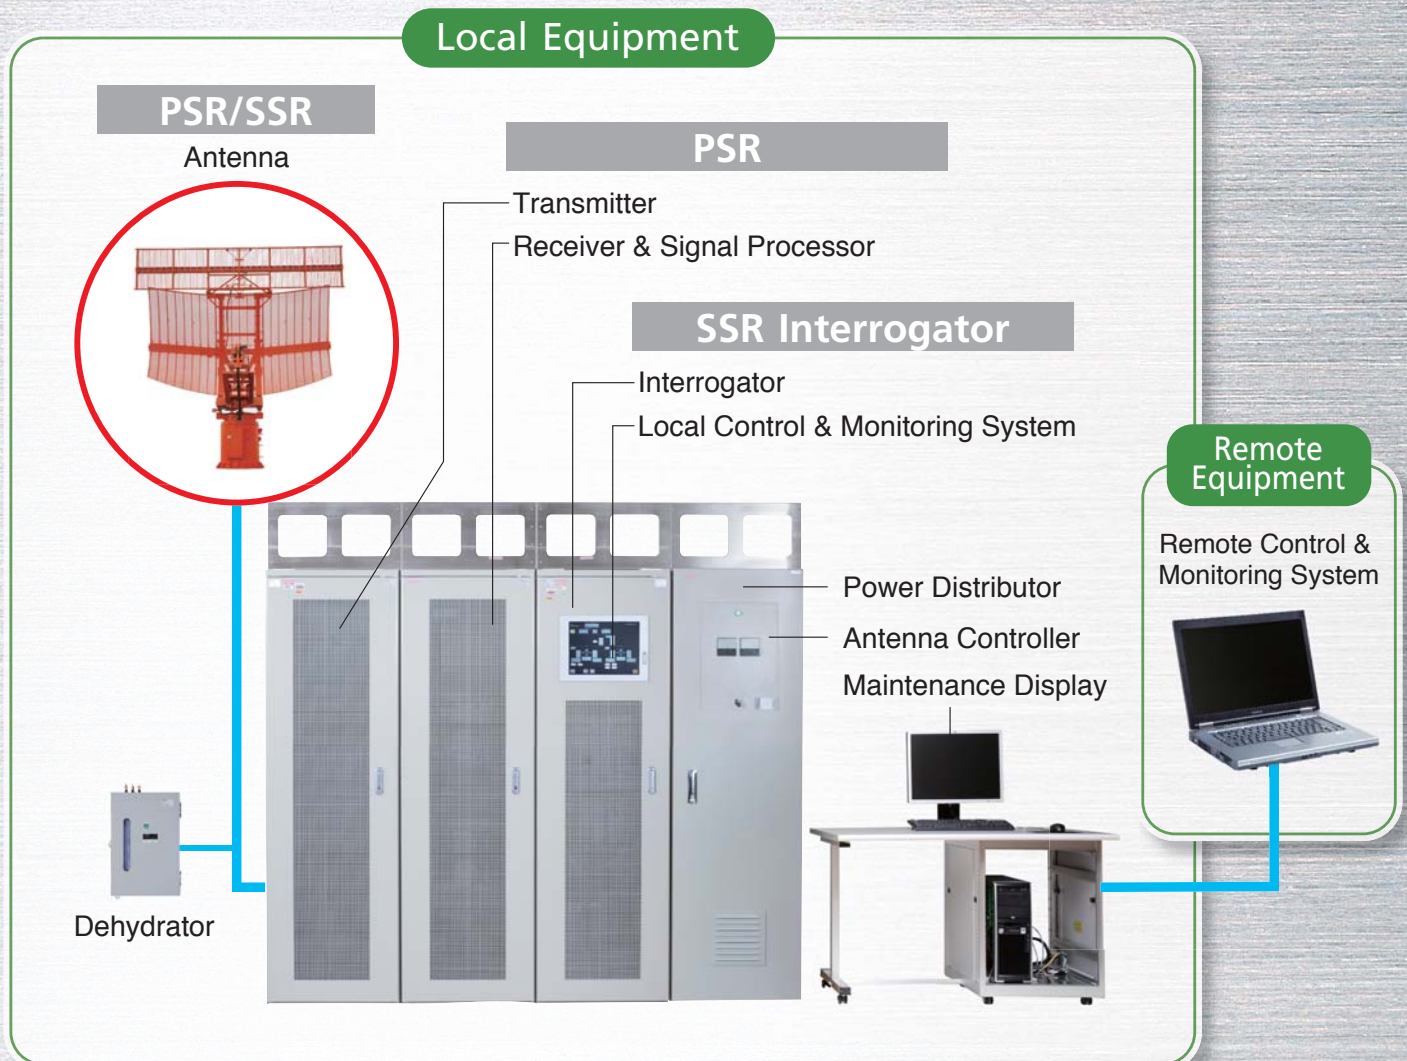

Key Product Features

System

- ◆ Full Solid State component
- ◆ Replace Work Minimization
- ◆ Duplex Configuration (Active /Stand-by Channel)
- ◆ Automatic Built-In-Test Equipment (BITE)
- ◆ Remote Control and Monitoring
- ◆ Low Life-Cycle Cost and High Reliability
- ◆ Compact size and Lightweight
- ◆ Color touch panel for local control
- ◆ Front accessible plug-in modules for easy exchange

PSR (Primary Surveillance Radar)

- ◆ All Solid State Transmitter
- ◆ Continuous operation to replace PA (Power Amplifier) Unit
- ◆ Compact Signal Processing - MTD (Moving Target Detector)
- ◆ High Speed Digital Processing - Digital I/Q Phase Detector, Digital Chirp Generator
- ◆ Weather Signal Processing

SSR (Secondary Surveillance Radar) Mode S

- ◆ All Solid State SSR Mode S Interrogator
- ◆ Large Vertical Aperture (LVA) Antenna
- ◆ ACAS Resolution Advisory (RD) Downlink Capability (GICB Protocol) (Option)

CHARACTERISTICS

1. PSR

Frequency	2,700 to 2,900 MHz	
Detection Coverage	0.5 to 60 NM ≥ 20,000 ft	$\sigma = 2 \text{ m}^2$, Pd = 80%, Pfa = 10 ⁻⁶ Extendable to 80 NM or 100 NM (Option)
Antenna Polarization	Linear / Circular	Selectable
Transmitter Power	12.5 kW peak	
Accuracy Azimuth	≤ 1.5°	
Range	≤ 75 m	
Maximum Target Rate	1,000 per scan	

2. SSR

Frequency	1,030 MHz	Transmit
	1,090 MHz	Receive
Detection Coverage	0.5 to 100 NM ≥ 100,000 ft	Extendable to 250 NM (Adjustable)
Accuracy Azimuth	≤ ±0.033°	Bias Error
Range	≤ ±30 ft	Bias Error
Interrogation Mode ATCRBS	1, 2, 3 / A, C	
Mode S	UF = 4, 5, 11	
Maximum Target Rate	900 per scan	

ENVIRONMENTAL CONDITIONS

Ambient Temperature (Except COTS)	Indoor Equipment	
	<ul style="list-style-type: none"> ● Operating: -10 to +40°C ● Storage: -30 to +60°C 	
	Outdoor Equipment (Standard)	Outdoor Equipment (Option)
	<ul style="list-style-type: none"> ● Operating: -30 to +60°C ● Storage: -30 to +60°C 	<ul style="list-style-type: none"> ● Operating: -50 to +60°C ● Storage: -50 to +60°C
Relative Humidity	Maximum 95%	Non condensing
Wind Resistance (Outdoor Equipment)	Operating	Survival
	<ul style="list-style-type: none"> ● Average: up to 35 m/s ● Maximum: up to 52.5 m/s 	<ul style="list-style-type: none"> ● Average: up to 50 m/s ● Maximum: up to 75 m/s
AC Input Power	180 to 220 VAC (3 φ), 50 / 60 Hz ± 5 %	

APPLICABLE STANDARDS

ICAO Annex 10
ITU-R SM, 1541-2 Annex 8
ISO 9001

©Toshiba Corporation 2013 all rights reserved.

- Design and specifications are subject to change without notice.
- The information contained herein is as of July, 2013.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA for any infringements of patents or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of TOSHIBA or others.
- TOSHIBA products should not be embedded to the downstream products which are prohibited to be produced and sold, under any law and regulations.
- The Toshiba products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These Toshiba products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage includes atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc. Unintended Usage of Toshiba products listed in this document shall be made at the customer's own risk.
- Toshiba does not take any responsibility for incidental damage (including loss of business profit, business interruption, loss of business information, and other pecuniary damage) arising out of the use or disability to use the product.
- Product and related software and technology may be controlled under the Japanese Foreign Exchange and Foreign Trade Law and the U.S. Export Administration Regulations. Export and re-export of Product or related software or technology are strictly prohibited except in compliance with all applicable export laws and regulations.
- GaAs (Gallium Arsenide) is used in this products. The dust or vapor is harmful to the human body. Do not break, cut, crush or dissolve chemically.